


HET



With Heavy Duty Standoff and 3/8" Square Rod



***A and B dimensions are "I.D." hole size dimensions**

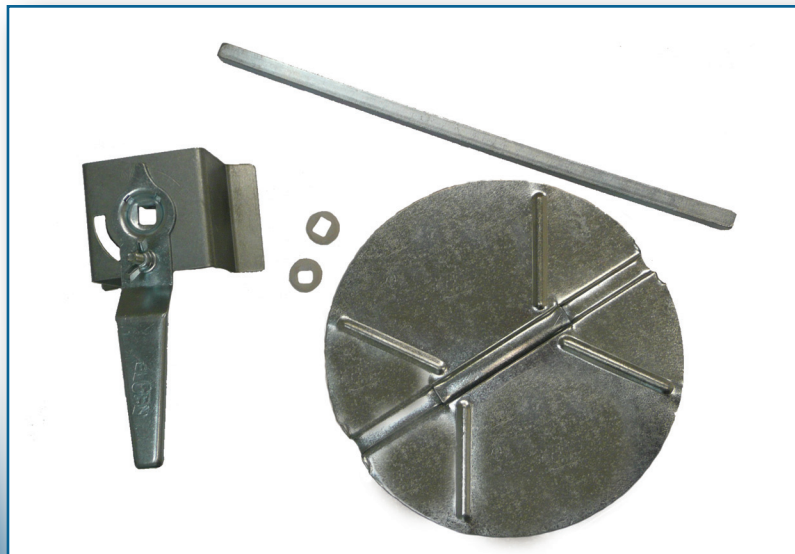

SPECS

Elgen Manufacturing
10 Railroad Ave, Closter NJ 07624
(800) 503-9805 :: www.elgenmfg.com

DESCRIPTION

- Elgen's HET (High Efficiency Take Off) with damper is used for low pressure applications.
- Elgen HET (High Efficiency Take Off) without damper can be used for high pressure application (up to 10" W.G.) as a low-leakage fitting due to its welded construction.

SPECIAL FEATURES

- 1/8" x 1" Polyethylene "High Density" Gasket
- Welded Seams For Added Strength & Low Leakage
 - Union Made
 - Bead and Crimp Come Standard
- Equipped with heavy duty standoff, damper blade, 3/8" square rod and nylon bushing
 - Standard 26 GA
 - 24 GA Available

TECHNICAL INFORMATION

- Formed from ASTM A-653 G60/G90 material

X	A X B	H
4" Round	9" x 4"	12"
5" Round	10" x 5"	12"
6" Round	12" x 6"	12"
7" Round	12" x 6"	12"
8" Round	12" x 6"	12"
9" Round	15" x 6.75"	12.5"
10" Round	16" x 6.75"	12.75"
12" Round	18" x 8.5"	12.75"
14" Round	20" x 9.5"	12.75"
16" Round	24" x 12"	17.25"

All dimensions +/- 0.25"

PRODUCT SPECIFICATIONS

Available In:

- Galvanized
- Stainless Steel
- Aluminum

PRODUCT GUARANTEE

Elgen's HET is guaranteed by Elgen Manufacturing for defective material.